


Image not found or type unknown

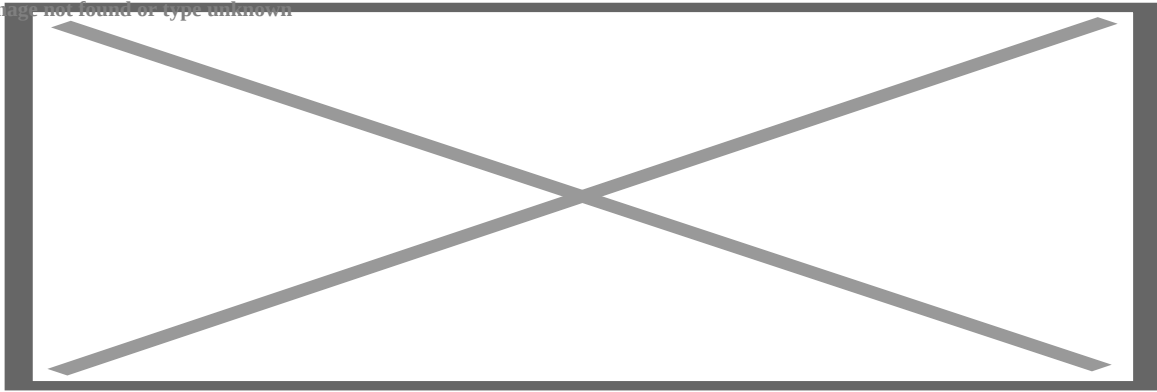

Model	UV-IPDF418
Hardware	
Sensor	1/2.7" SOI F02 + Hi3518EV200
Resolution	1080P 2MP
Lens	3.6mm 3 Megapixel fixed CS lens
IR LED	36pc IR LED 25-35m IR distance
Day/Night	IR-CUT
Min. Illumination	0.5lux; 0 lux with IR on
Max S/N Ratio	50dB
Video	
Compression	H.264
image	main stream: 1920x1080@1-25fps sub stream: 640x360@1-25fps 320x180@1-25fps
Bit Rate	128~4096kbps, Supports CBR/VBR
Image Control	Hue, saturation, brightness, contrast, exposure
Auto Image Control	AE, AWB

Audio(Optional)	
Compression	G.711-A
Bit Rate	64kbps/128kbps
Talkback	support
Network	
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, FTP, UPNP
Compliance	ONVIF 2.4(1.02 backward compatible)
PC Client and Browser	ISS, IE6.0 and above
Mobile phone	Iphone, ipad, Android
WIFI Encryption	WAP, WAP2
Interface	
Audio Input(Optional)	1 CH 3.5mm audio interface, MIC IN/LINE IN
Audio Output(Optional)	1 CH 3.5mm audio interface
LAN	1 RJ45 10M/100M Ethernet port
General	
Working Temperature	-10°C~ +55°C
Working Humidity	0% - 90%
Protection Level	IP66 Rated Waterproof
Power Supply	DC 12 V/1A
Power Consumption	Maximum 6w

Approvals

CE , FCC, RoHS

Unique VISION CCTV TECHNOLOGY

Design & Specifications subject to change without prior notice.



Exclusive Distributon in Bangladesh

