


Image not found or type unknown

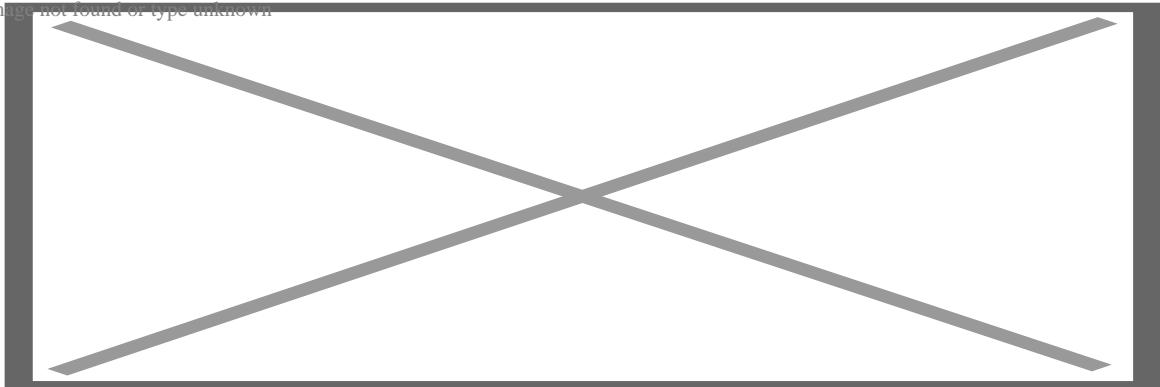

Model	UV-IPDP417
Hardware	
Sensor	1/3" CMOS Sensor
Resolution	2592×1920 4/5MP
Lens	2.8/3.6/6mm lens
LED	24PCS 5 IR LEDs
Day/Night	IR-CUT
N. Illumination	0.5lux; 0 lux with IR on
Max S/N Ratio	50dB
Video	
Compression	H.265
Frame Rate	main stream: 5.0/4.0MP@20fps sub stream: 3.0MP@30fps
Rate	128~4096kbps, Supports CBR/VBR
Image Control	Hue, saturation, brightness, contrast, exposure
Auto to Image Control	AE, AWB
Audio(Optional)	

mpression	G.711-A
Rate	64kbps/128kbps
lback	support
obile phone	Iphone, ipad, Android
FI Encryption	WAP, WAP2

erface

udio Input(Optional)	1 CH 3.5mm audio interface, MIC IN/LINE IN
udio Output(Optional)	1 CH 3.5mm audio interface

neral

orking Temperature	-10°C~ +55°C
orking Humidity	0% - 90%
protection Level	IP66 Rated Waterproof
wer Supply	DC 12 V/1.5A
wer Consumption	Maximum 6w
rovals	CE , FCC, RoHS

Unique VISION CCTV TECHNOLOGY

esign & Specifications subject to change without prior notice.



Exclusive Distribution in Bangladesh

