


Image not found or type unknown



Element Type	Resettable
Operating Voltage	12 to 24Vdc
Operating Conditions	Tested to: -20°C to 60°C (-68°F to 140°F) Humidity: 0% to 95% RH, non-condensing
Design Environment	Indoor Use Only
Mounting Semi Flush or Surface	Semi Flush or Surface
compatible with	ProFyre C8 and C24 conventional fire alarm systems
Quiescent current	1μA
Alarm current	25 mA at 24V 12 mA at 12V
Normal Indicator	Green LED(Blinks during scan)
Alarm	Red LED (Glows Steady)
Operating temperature	0°C to 49°C
Dimensions(HXWXD)	120x120x48mm

**Exclusive Distributon in Bangladesh**

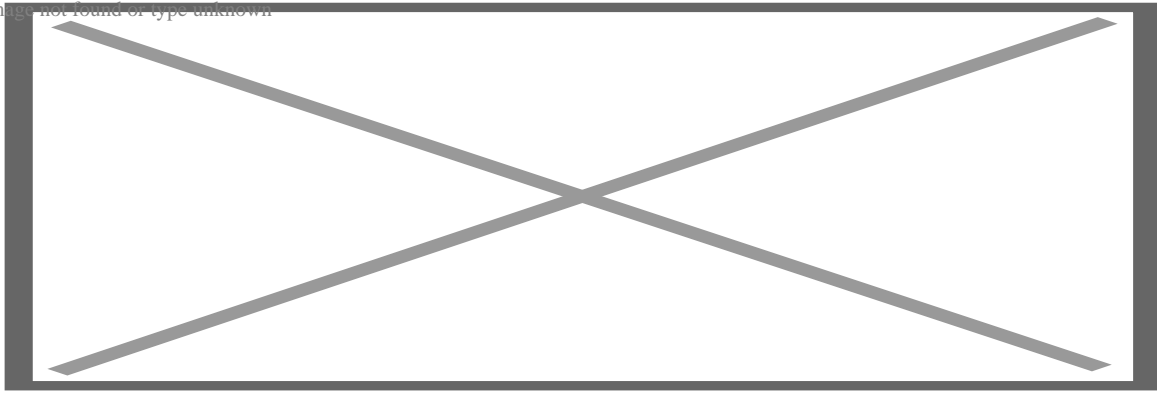