


Image not found or type unknown



Model	MP60UB
Rated power	60W
Speaker Outputs	100V or 70V & 4Ohms-8 Ohms-16 Ohms
Attenuation	Microphone1-3, line1-2 and Mp3/FM, bass/treble and master
MIC1 input sensitivity	5mV
MIC2 input sensitivity	5mV
MIC input sensitivity	5mV
AUX1 input sensitivity	350mV
AUX2 input sensitivity	350mV
EMC input sensitivity	350mV
MIC frequency response	180Hz?10kHz?±3dB?
AUX frequency response	70Hz?16kHz?±3dB?
Noise	<5mV (4 ohm load output terminal)
THD	<1% 1KHz
Protection	Short-circuit, clip, overload and high temp protection
Treble adjustment	10dB?±2?
Rated power Supply	AC~110-220V
Machine size (L×W×H)	247*198*66mm
Packing size	343*302*121mm (1PS)
Maximum packing size	630*355*283mm (4PS)
Net Weight	2.6 Kg

Exclusive Distributon in Bangladesh

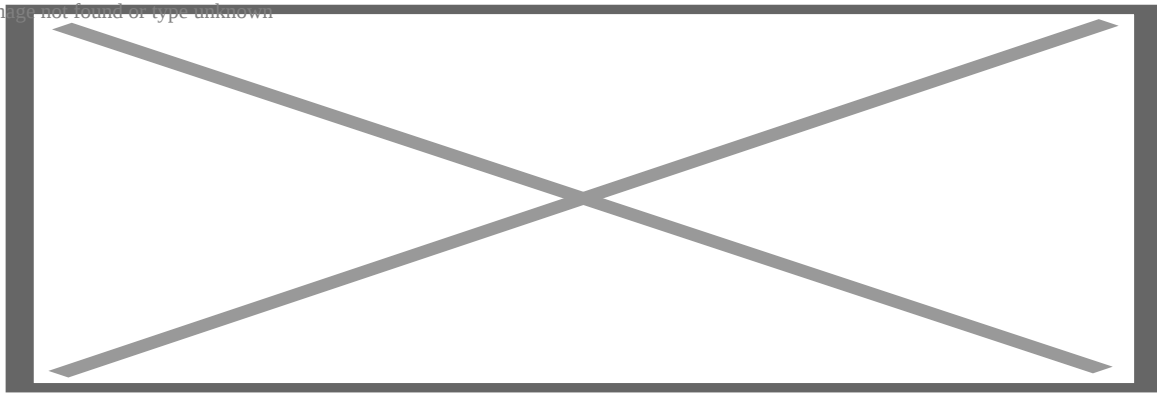