




Image not found of type unknown

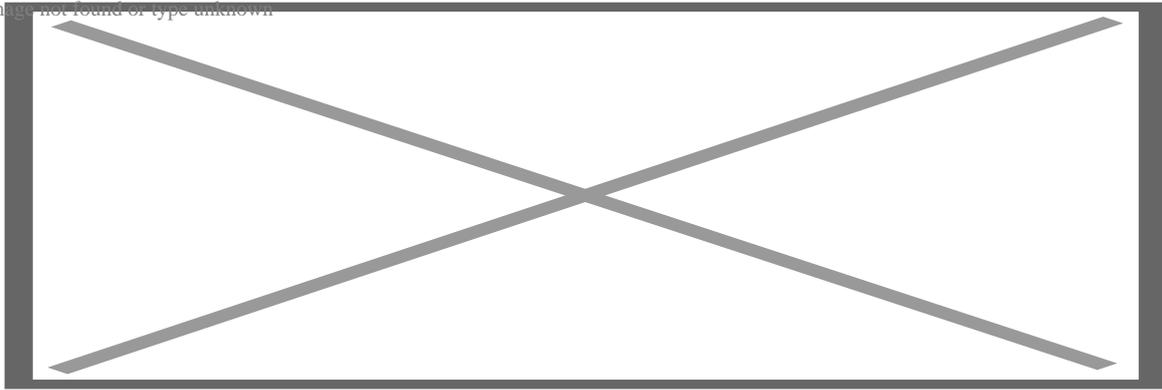

**Technical Specifications:**

- Networking Interface: (1) 10/100/1000 Ethernet Ports
- Antennas: (1) Dual-Band Antenna, Tri-Polarity, 3 dBi
- Max TX Power: 2.4GHz: 24 dBm - 5GHz: 22 dBm
- Buttons: Reset
- Wifi Standards: 802.11 a/b/g/n/ac
- Power Method: Passive Power over Ethernet (24V), (Pairs 4, 5+; 7, 8 Return)
- Power Supply: 24V, 0.5A Gigabit PoE Adapter
- Maximum Power Consumption: 6.5W
- BSSID: Up to Four Per Radio
- Power Save: Supported
- Wireless Security: WEP, WPA-PSK, WPA-Enterprise (WPA/WPA2, TKIP/AES)
- Certifications: CE, FCC, IC
- Mounting: Wall and Ceiling
- Operating Temperature: -10 to 70°C (14 to 158°F)
- Operating Humidity: 5 to 95% non-condensing

**Advanced Traffic Management:**

- VLAN: 802.1Q
- Advanced QoS: Per-User Rate Limiting
- Guest Traffic Isolation: Supported
- WMM: Voice, Video, Best Effort and Background
- Concurrent Clients: 200

**Product Includes:**

- UniFi AP AC LR
- Mounting Bracket
- Ceiling Backing Plate
- Flat Head Screws (M3x50, Qty. 4)
- Keps Nuts (M3, Qty. 4)
- Screws (M2.9x20, Qty. 4)
- Screw Anchors (M3x20, Qty. 4)
- Gigabit PoE (24V, 0.5A) with Mounting Bracket
- Power Cord
- Quick Start Guide

**Exclusive Distributon in Bangladesh**

